



## FK-632L UL EMERGENCY LIGHT-LED TYPE STANDARD


### FEATURES:

Certificate:UL E345524

High precision molded thermoplastic housing and Fire retardant ABS base. 3 hours battery back up with high active LED light source. High brightness, long life Economical reliable and safety Universal installation and easy maintenance

### TECHNICAL PARAMETERS:

1. Working voltage: AC220-240V 50/60Hz
2. AC power: 3.5W
3. Charging time: 24 hours, with overcharge and discharge protection
4. Emergency duration time: more than 3 hours
5. Light source: 20pcs LED
6. Battery: Ni-CD 3.6V2Ah
7. Working temperature: -5°C-45°C
8. Working humidity: 90%RH, suitable for use in damp locations.
9. IP rate: IP65
10. Maximum mounting height: 9.48ft(2.891m)
11. Charging LED indicator and test button
12. Product size: 34.6 X10.6 X 7.9 cm

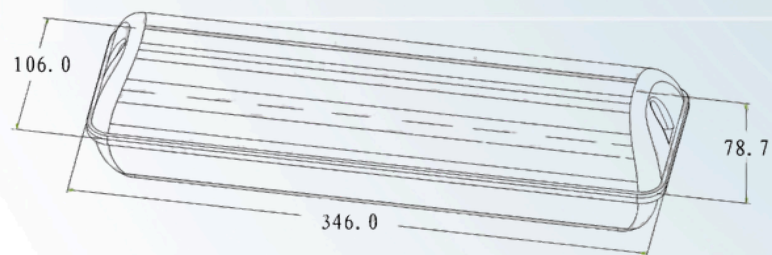

IP65